


| SILVER GREY



VARIATIONS

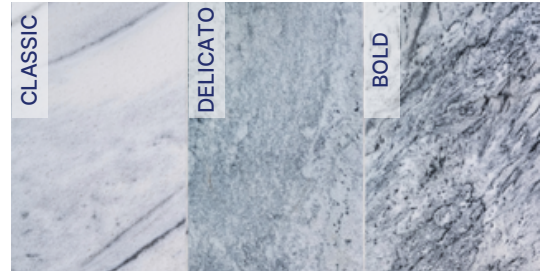

DESCRIPTION

The Silver Grey range embodies the untamed spirit of Yen Bai nature. It features a grey backdrop with characteristic veining in bolder hues. While the classic variation has diagonal veining, other variations are truly infinitely random, reminiscent to a cosmic sky.

AVAILABLE FINISHES

- Polished
- Leather
- Bush hammer

APPLICATION

- Countertops
- Interior flooring
- Exterior cladding
- Book matching
- Exterior flooring

PHYSICAL TEST RESULTS

PROPERTIES	INDICATORS	NORM
Density	2710 kg/m3	ASTM C97/ C97M-15 (*) EN 1936
Open porosity	0,4%/0.5%/0.6% (*)	ISO:10545-3:1995
Water absorption	0.8%	ASTM C97/ C97M-15 EN 13755
Compressive strength	58.4 MPa (dry cond.) 57	ASTM C880/ C880M-15
Flexural strength	12.6 Mpa -dry cond., 12-wet cond.	ASTM C99/ C99M-15 (*)
Resistance to abrasion	12.5 HS, 19.5 mm3	ASTM, EN
Frost resistance	No structural change under -18C	ASTM A 326-3
Slip resistance	R9 (**), R10 (***)	DIN51130, EN 14231
Fire resistance	Resistant	ISO 1182:2010

(*) - Polished/Leathered/Bush Hammer & Sandblasted
 (**) - Polished, Leather (interior living areas, offices, retail, hallway, corridors)
 (***) - Sandblasted & Bush Hammer (interior, exterior)



Quarry, Processing & Marble Export
 SLAB | TILES