



AURORA BOREALIS

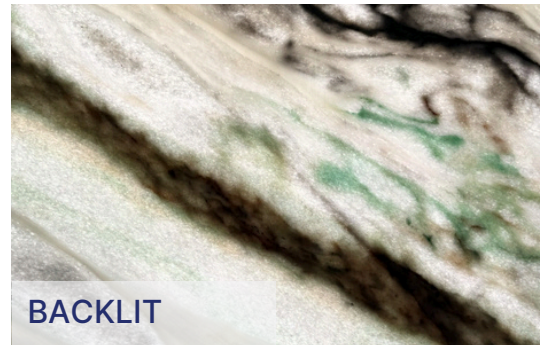

VARIATIONS

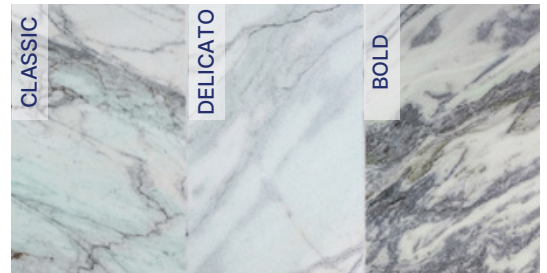

DESCRIPTION

The exotic allure of Aurora Borealis lies in its crisp pastel green shades. In daylight, its calming hues trickle Zen into any interior, used widely for countertops and wall cladding. However, when the night drops and under back lighting, the translucent mint green transforms into electric emerald and grabs the spotlight within any room.

AVAILABLE FINISHES

- Polished
- Leather
- Bush hammer

APPLICATION

- Interior cladding
- Countertops
- Interior flooring
- Book match

PHYSICAL TEST RESULTS

PROPERTIES	INDICATORS	NORM
Density	2710 kg/m ³	ASTM C97/ C97M-15 (*) EN 1936
Open porosity	0,4%/0.5%/0.6% (*)	ISO:10545-3:1995
Water absorption	0.8%	ASTM C97/ C97M-15 EN 13755
Compressive strength	58.4 MPa (dry cond.) 57	ASTM C880/ C880M-15
Flexural strength	12.6 Mpa -dry cond., 12-wet cond.	ASTM C99/ C99M-15 (*)
Resistance to abrasion	12.5 HS, 19.5 mm ³	ASTM, EN
Frost resistance	No structural change under -18C	ASTM A 326-3
Slip resistance	R9 (**), R10 (***)	DIN51130, EN 14231
Fire resistance	Resistant	ISO 1182:2010

(*) - Polished/Leathered/Bush Hammer & Sandblasted

(**) - Polished, Leather (interior living areas, offices, retail, hallway, corridors)

(***) - Sandblasted & Bush Hammer (interior, exterior)



Quarry, Processing & Marble Export
SLAB | TILES

