

| WHITE CALCITE



DESCRIPTION

White Calcite is our unique variation of Vietnamese pure white. Just as is typical for Vietnamese white, its crystal grain structure glistens upon shine. However, unique to this product range, is the light diagonal tiger veining which spread across the entire slab and add further plasticity to the material.

AVAILABLE FINISHES

- Polished
- Leather

APPLICATION

- Interior cladding
- Exterior cladding
- Interior flooring


PHYSICAL TEST RESULTS

PROPERTIES	INDICATORS	NORM
Density	2710 kg/m ³	ASTM C97/ C97M-15 (*) EN 1936
Open porosity	0,4%/0,5%/0,6% (*)	ISO:10545-3:1995
Water absorption	0.8%	ASTM C97/ C97M-15 EN 13755
Compressive strength	58.4 MPa (dry cond.) 57	ASTM C880/ C880M-15
Flexural strength	12.6 Mpa -dry cond., 12-wet cond.	ASTM C99/ C99M-15 (*)
Resistance to abrasion	12.5 HS, 19.5 mm ³	ASTM, EN
Frost resistance	No structural change under -18C	ASTM A 326-3
Slip resistance	R9 (**), R10 (***)	DIN51130, EN 14231
Fire resistance	Resistant	ISO 1182:2010

(*) - Polished/Leathered/Bush Hammer & Sandblasted

(**) - Polished, Leather (interior living areas, offices, retail, hallway, corridors)

(***) - Sandblasted & Bush Hammer (interior, exterior)

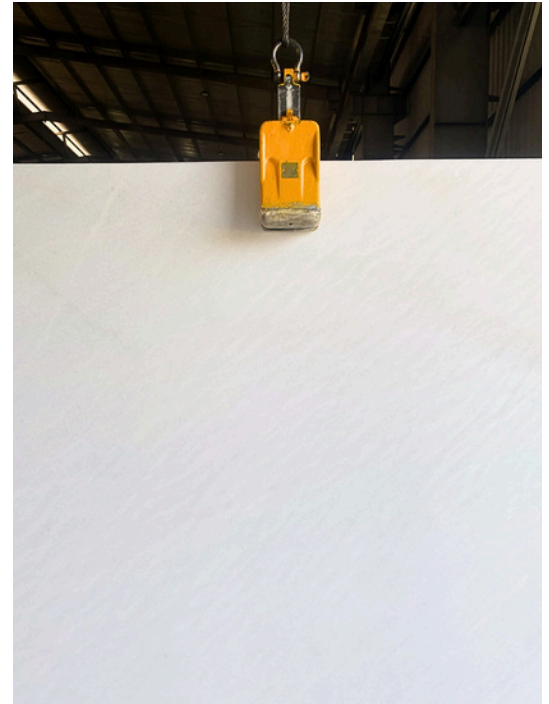

POLISHED



LEATHER



Quarry, Processing & Marble Export
SLAB | TILES